

## DRIVER

# DR-DG-20-HO

## 22 Gbps High Output Voltage Driver

The DR-DG-20-HO is a driver module optimized for digital applications requiring an upper operation voltage. It exhibits 12.5 V<sub>pp</sub> output voltage and 29 dB gain up to 23 GHz.

The DR-DG-20-HO module is especially useful for driving LiNbO<sub>3</sub> modulators with 22 Gbps DPSK and 2x20 Gbps (D)QPSK modulation formats. It is operated from a single power supply voltage for safety and ease of use and offers gain and cross-point control.

The DR-DG-20-HO comes with K type RF connectors (female in, male out) and with an optional heat-sink. It is a non-inverting and single ended amplifier.



### FEATURES

- High output voltage 12.5 V<sub>pp</sub>
- High gain 29 dB
- Flat gain up to 20 GHz
- Single voltage power supply

### APPLICATIONS

- 22 Gbps DPSK
- 2x20 Gbps (D)QPSK
- Spectrum broadening

### OPTIONS

- 13.5 V<sub>pp</sub> output voltage
- Heat-sink
- Analog version

### RELATED EQUIPMENTS


- MXIQUER-LN-40, MX-LN-20 modulators
- MBC-DG Automatic Bias Controllers

### Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off frequencies	80 k	23 G	25 G	Hz
Output voltage	-	12.5	13.5	V <sub>pp</sub>
Gain	-	29	-	dB
Saturated power	26	-	-	dBm
Added jitter	-	1.05	-	ps
Rise / Fall times	-	12 / 16	-	ps

Measurements for V<sub>bias</sub> = 12 V, V<sub>amp</sub> = 1.2 V, V<sub>xp</sub> = 0.7 V, I<sub>bias</sub> = 550 mA

### 20 Gbps Output Response

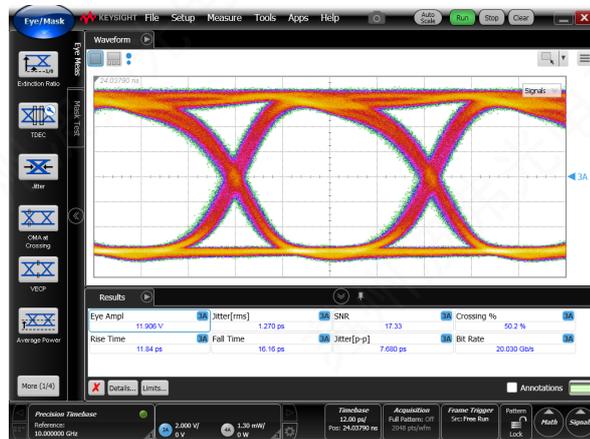

# DR-DG-20-HO

## 22 Gbps High Output Voltage Driver

### DC Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage (fixed)	$V_{bias}$	-	12	13	V
Current consumption	$I_{bias}$	-	0.53	0.58	A
Gain control voltage	$V_{amp}$	0	1.5	2	V
Cross Point control voltage	$V_{xp}$	0	0.7	1	V

### Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Lower frequency	$f_{3dB}$ lower	-3 dB point	-	-	80	kHz
Upper frequency	$f_{3dB}$ upper	-3 dB point	-	23	25	GHz
Gain	$S_{21}$	Small signal	-	29	-	dB
Gain ripple	-	$f < 17$ GHz	-	$\pm 1.5$	-	dB
Input return loss	$S_{11}$	$50 \text{ kHz} < f < 18 \text{ GHz}$	-	-10	-	dB
Output return loss	$S_{22}$	$50 \text{ kHz} < f < 15 \text{ GHz}$	-	-10	-	dB
Saturated power	$P_{sat}$	$V_{in} = 0.65 V_{pp}$	26	-	-	dBm
Output voltage	$V_{out}$	$V_{in} = 0.65 V_{pp}$ @ 20 Gbps	-	12.5	$13.5 (V_{in} = 0.8 V_{pp})$	$V_{pp}$
Rise / Fall time	$t_r / t_f$	20 % - 80 %	-	12 / 16	-	ps
Added Jitter	$J_{RMS}$	$J_{RMS} = \sqrt{J_{RMS-total}^2 - J_{RMS-source}^2}$	-	1.05	-	ps
Power dissipation	$P$	$V_{out} = 12.5 V_{pp}$	-	6.4	-	W

Conditions:  $V_{in} = 0.65 V_{pp}$ ,  $T_{amb} = 25^\circ\text{C}$ , 50  $\Omega$  system

### Absolute Maximum Ratings


Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input voltage	$V_{in}$	-	0.8	$V_{pp}$
Supply voltage	$V_{bias}$	-	13	V
DC current	$I_{bias}$	-	0.58	A
Gain control voltage	$V_{amp}$	0	2	V
Cross Point control voltage	$V_{xp}$	0	1	V
Power dissipation	$P_{diss}$	-	7.3	W
Operating temperature	$T_{op}$	0	+40	$^\circ\text{C}$
Storage temperature	$T_{st}$	-10	+70	$^\circ\text{C}$

# DR-DG-20-HO


$S_{21}$  Parameter Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

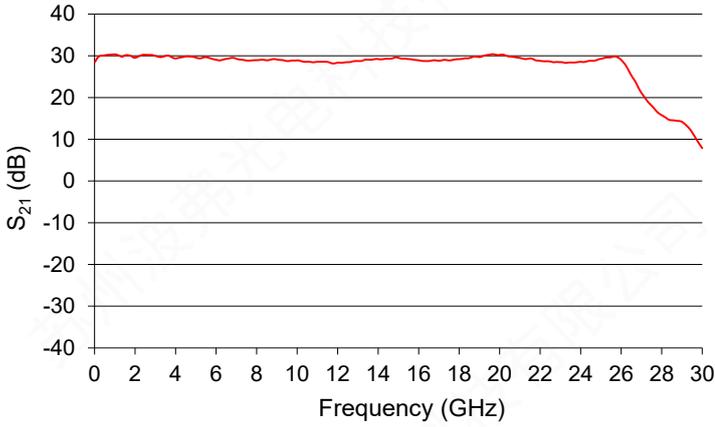


Group Delay Parameter Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

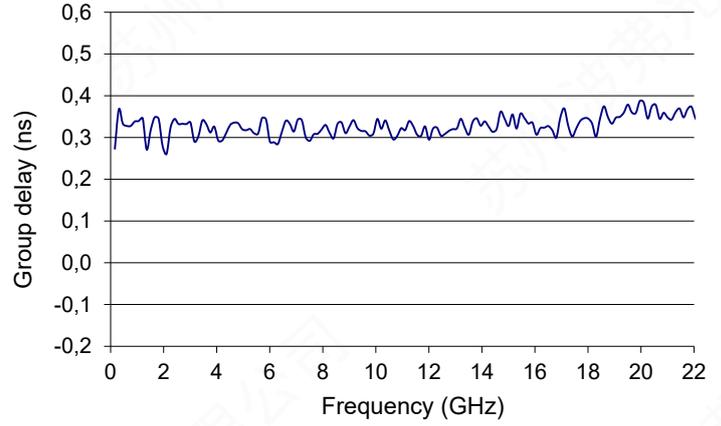


$S_{22}$  Parameter Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

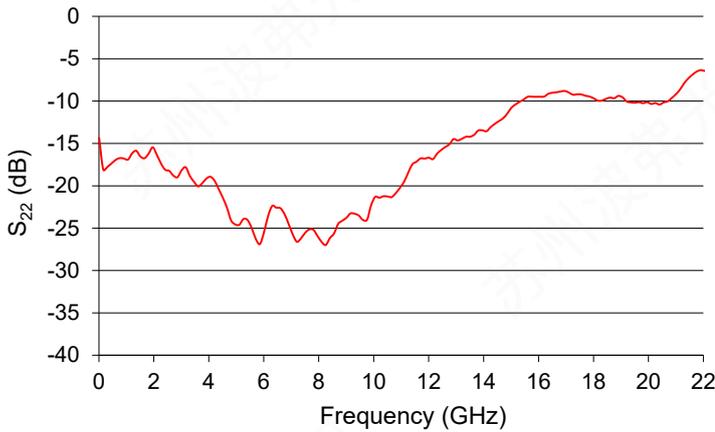


$S_{11}$  Parameter Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

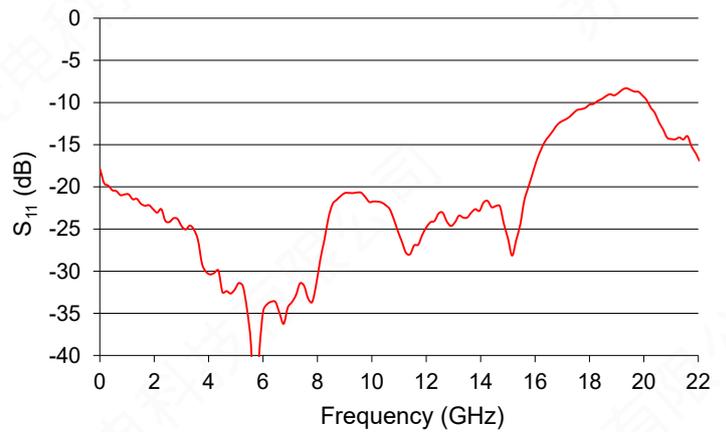


$S_{12}$  Parameter Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

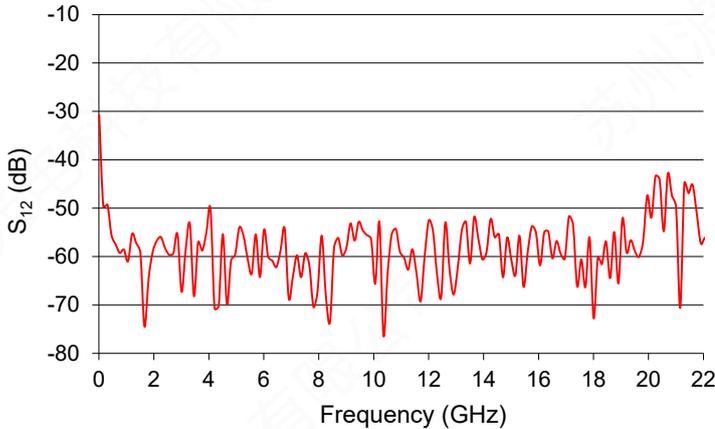

Noise Factor Curve

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 550\text{ mA}$

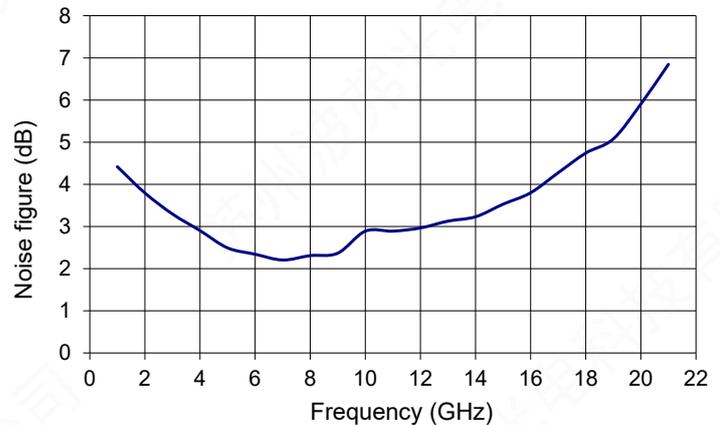


# DR-DG-20-HO

## Eye Diagrams


### 10 Gbps data rate

Conditions: Ratio 1/2, Pattern 2<sup>31</sup>-1

$V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.4\text{ V}$ ,  $V_{xp} = 0.7\text{ V}$ ,  $I_{bias} = 501\text{ mA}$

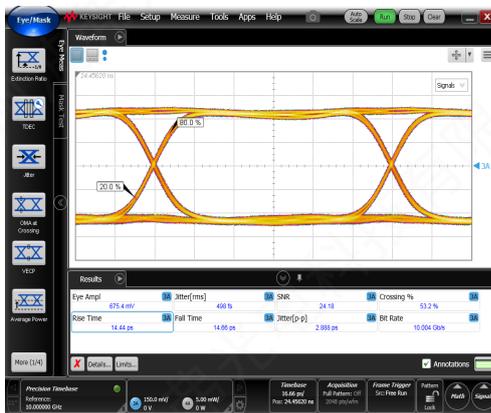

Input signal  
Eye amplitude = 0.66 V<sub>pp</sub>

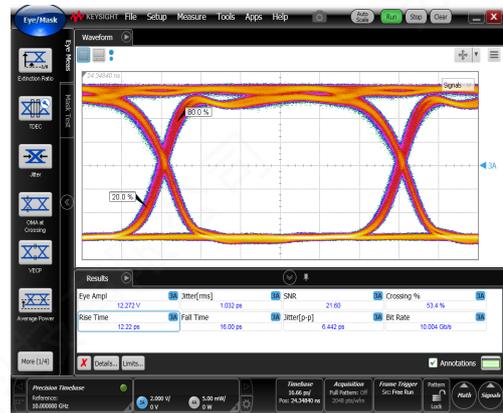


Output response  
Eye amplitude = 12.2 V<sub>pp</sub>


### 20 Gbps data rate

Conditions: Ratio 1/2, Pattern 2<sup>31</sup>-1

$V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.5\text{ V}$ ,  $V_{xp} = 0.8\text{ V}$ ,  $I_{bias} = 575\text{ mA}$

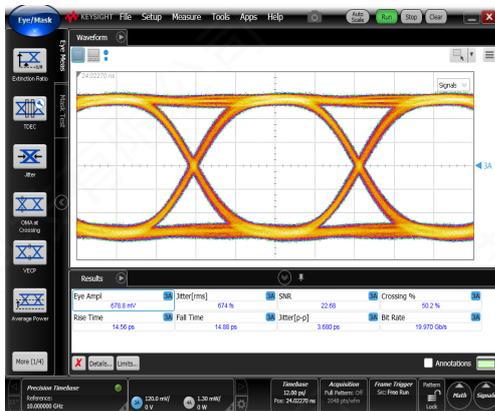


Input signal  
Eye amplitude = 0.66 V<sub>pp</sub>

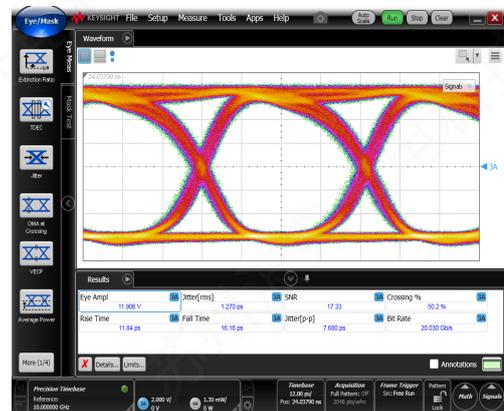


Output response  
Eye amplitude = 11.9 V<sub>pp</sub>

Electrical Schematic Diagram

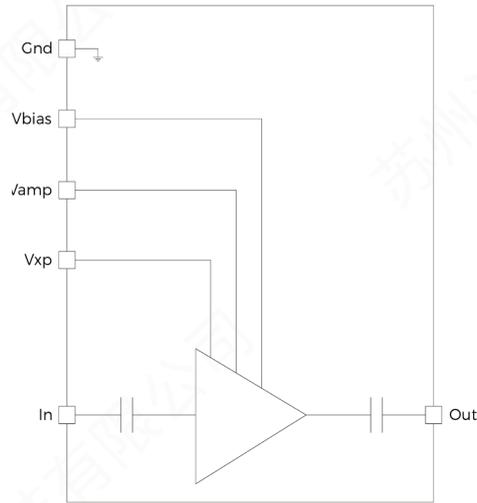

Mechanical Diagram and Pinout  
All measurements in mm


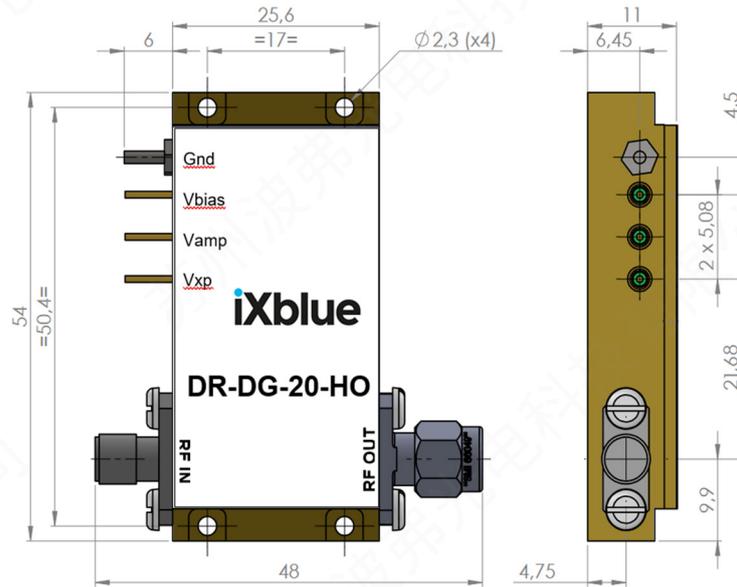


 The heat-sinking of the module is necessary. It's user responsibility to use an adequate heat-sink. Refer to page 6 for iXblue recommended heat-sink.

PIN	Function	Operational Note
IN	RF In	Female K connector
OUT	RF Out	Male K connector
V <sub>bias</sub>	Power supply voltage	Set a typical operating specification
V <sub>amp</sub>	Output voltage amplitude adjustment	Adjust for gain control tuning
V <sub>amp</sub>	Output voltage cross point adjustment	Adjust for cross point control tuning

Mechanical Diagram and Pinout with HS-HO1 Heat-sink

All measurements in mm

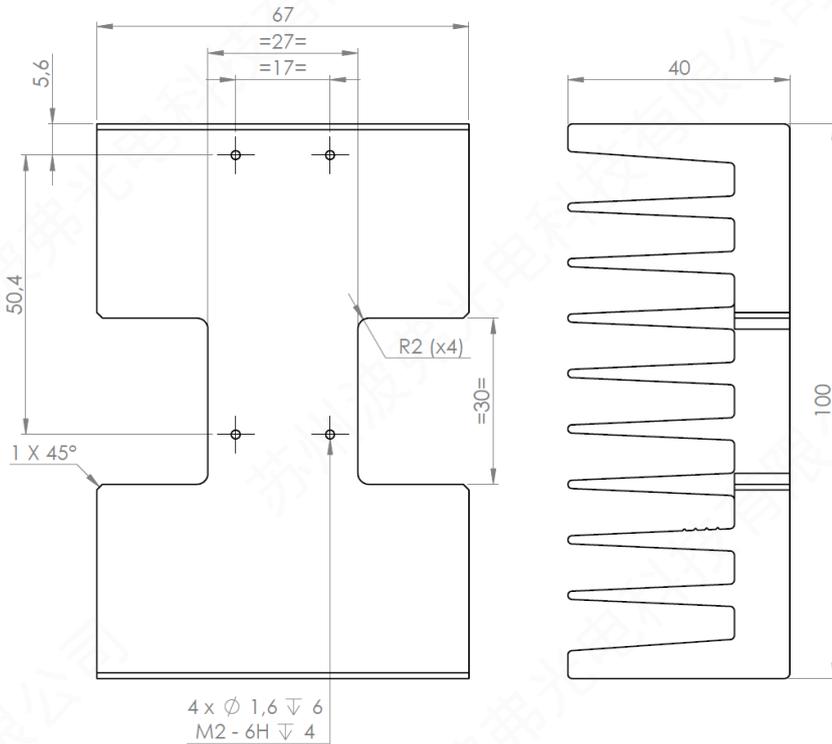

## About us

iXblue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO<sub>3</sub>) modulators and RF electronic modules.

iXblue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

iXblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products.

**iXblue**